Bluetooth Security

News from the Front

What The Hack

July 29th 2005, Liempde, Netherlands

Adam Laurie, Marcel Holtmann, Martin Herfurt

trifinite.org

Who we are

- Adam Laurie
  - CSO of The Bunker Secure Hosting Ltd.
  - Co-Maintainer of Apache-SSL
  - DEFCON Staff/Organiser
- Marcel Holtmann
  - Maintainer and core developer of the Linux Bluetooth Stack BlueZ
- Martin Herfurt
  - Security Researcher & Java Programmer
  - Founder of trifinite.org

Bluetooth Technology Overview

- Bluetooth SIG
  - Trade Association
  - Founded 1998
  - Owns & Licenses IP
  - Individual membership free
  - Promoter members: Agere, Ericsson, IBM, Intel, Microsoft, Motorola, Nokia and Toshiba
  - Consumer http://www.bluetooth.com
  - Technical http://www.bluetooth.org

RITSCH-RENN.COM
New device found: Airbus A310
Proceed with configuration ?
luca scheuring airlines
luca scheuring airlines
Es wurde ein neues Gerät gefunden.
Device:Airbus A310
Soll die Auto-Konfiguration gestartet werden?
Start
Abbrechen
Bluetooth
1/2003

Bluetooth Technology

- Data and voice transmission
  - ACL (Asynchronous Connectionless) data connections
  - SCO (Synchronous Connection Oriented) voice channel
    - Fixed rate - 64Kbps
  - eSCO (Extended SCO)
    - Variable data rate & retransmit for Audio / Video etc.
- Frequency hopping
  - ISM band at 2.4 GHz
  - 79 channels
  - 1600 hops per second
  - Multi-Slot packets
    - Up to 5 slots per packet

Bluetooth Piconet

- Bluetooth devices create a piconet
  - One master per piconet
  - Up to seven active slaves
  - Over 200 passive members are possible
  - Master sets the hopping sequence
  - Transfer rates of 721 Kbit/sec
- Bluetooth 1.2 and EDR (aka 2.0)
  - Adaptive Frequency Hopping
  - Faster connection times
  - Transfer rates up to 2.1 Mbit/sec

Bluetooth Scatternet

- Connected piconets create a scatternet
  - Master in one and slave in another piconet
  - Slave in two different piconets
  - Only master in one piconet
  - Scatternet support is optional

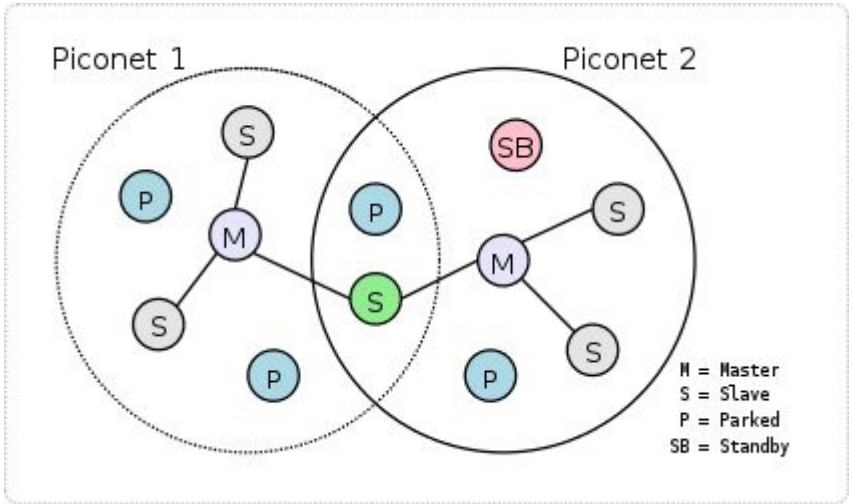

Bluetooth Architecture

- Hardware layer
  - Radio, Baseband and Link Manager
  - Access through Host Controller Interface
    - Hardware abstraction
    - Standards for USB and UART
- Host protocol stack
  - L2CAP, RFCOMM, BNEP, AVDTP etc.
- Profile implementations
  - Serial Port, Dialup, PAN, HID etc.

Bluetooth Stack

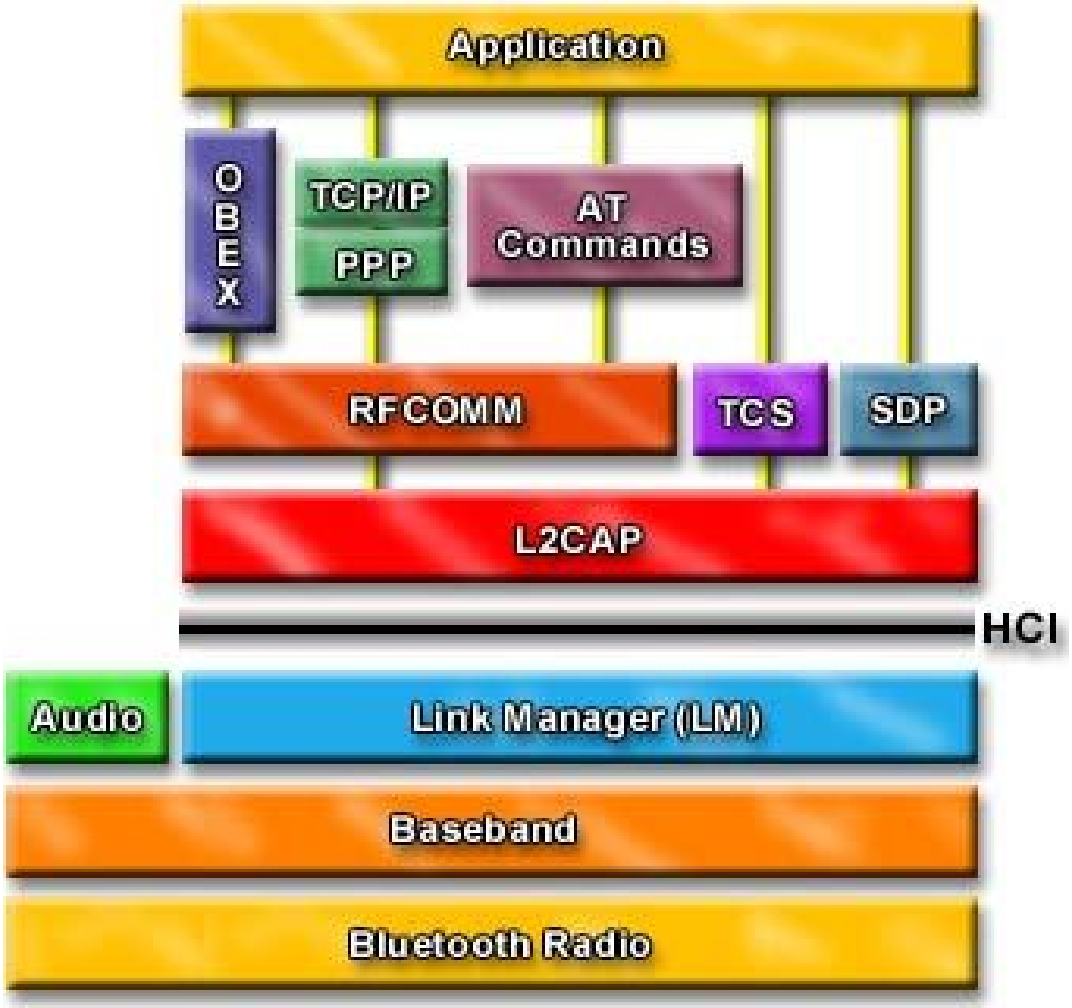

Application specific security mechanisms

Bluetooth host security mechanisms

Security mechanisms on the Bluetooth chip

Bluetooth Security

- Link manager security
  - All security routines are inside the Bluetooth chip
  - Nothing is transmitted in “plain text”
- Host stack security
  - Interface for link manager security routines
  - Part of the HCI specification
  - Easy interface
  - No further encryption of pin codes or keys

Security Mode

- Security mode 1
  - No active security enforcement
- Security mode 2
  - Service level security
  - On device level no difference to mode 1
- Security mode 3
  - Device level security
  - Enforce security for every low-level connection

Linux and Bluetooth

```
# hciconfig -a
hci0:   Type: USB
        BD Address: 00:02:5B:A1:88:52 ACL MTU: 384:8  SCO MTU: 64:8
        UP RUNNING PSCAN ISCAN
        RX bytes:9765 acl:321 sco:0 events:425 errors:0
        TX bytes:8518 acl:222 sco:0 commands:75 errors:0
        Features: 0xff 0xff 0x8b 0xfe 0x9b 0xf9 0x00 0x80
        Packet type: DM1 DM3 DM5 DH1 DH3 DH5 HV1 HV2 HV3
        Link policy: RSWITCH HOLD SNIFF PARK
        Link mode: SLAVE ACCEPT
        Name: 'Casira BC3-MM'
        Class: 0x1e0100
        Service Classes: Networking, Rendering, Capturing, Object Transfer
        Device Class: Computer, Uncategorized
        HCI Ver: 1.2 (0x2) HCI Rev: 0x529 LMP Ver: 1.2 (0x2) LMP Subver: 0x529
        Manufacturer: Cambridge Silicon Radio (10)

# hcitool scan
Scanning ...
        00:04:0E:21:06:FD       AVM BlueFRITZ! AP-DSL
        00:01:EC:3A:45:86       HBH-10
        00:04:76:63:72:4D       Aficio AP600N
        00:A0:57:AD:22:0F       ELSA Vianect Blue ISDN
        00:E0:03:04:6D:36       Nokia 6210
        00:80:37:06:78:92       Ericsson T39m
        00:06:C6:C4:08:27       Anycom LAN Access Point
```

Sniffing with hcidump

- Recording of HCI packets
  - Commands, events, ACL and SCO data packets
- Only for local connections
- Decoding of higher layer protocols
  - HCI and L2CAP
  - SDP, RFCOMM, BNEP, CMTP, HIDP, HCRP and AVDTP
  - OBEX and CAPI
- No sniffing of baseband or radio traffic
  - http://www.fte.com - sniffer dongles

How pairing works

- First connection
  (1) HCI_Pin_Code_Request
  (2) HCI_Pin_Code_Request_Reply
  (3) HCI_Link_Key_Notification

- Further connections
  (1) HCI_Link_Key_Request
  (2) HCI_Link_Key_Request_Reply
  (3) HCI_Link_Key_Notification (optional)

Link Key

- Used for authentication
  - Challenge-Response
- Used for encryption
  - SAFER+ (128bit Blockcipher)
- Generated by Pairing (or Bonding) Process
  - Passkey (1-16 alphanum. chars) – Never communicated (secret)
  - Random number – Explicitely communicated (public)
  - Master BDADDR – Implicitly communicated (public)
- Usually stored on devices

BlueSnarf

- Trivial OBEX PUSH channel attack
  - PULL known objects instead of PUSH
  - No authentication
- Infrared Data Association
  - IrMC (Specifications for Ir Mobile Communications)
    - e.g. telecom/pb.vcf
- Sony Ericsson T68, T68i, R520m, T610, Z1010
- Nokia 6310, 6310i, 8910, 8910i
- Devicelist on bluestumbler.org

BlueSnarf++

- Trivial OBEX PUSH channel attack
  - Connect to Sync, FTP or BIP UUID/target
  - No authentication
  - Contents Browseable
  - Full read/write access
  - External Media Storage

BlueSnarf++ in Detail

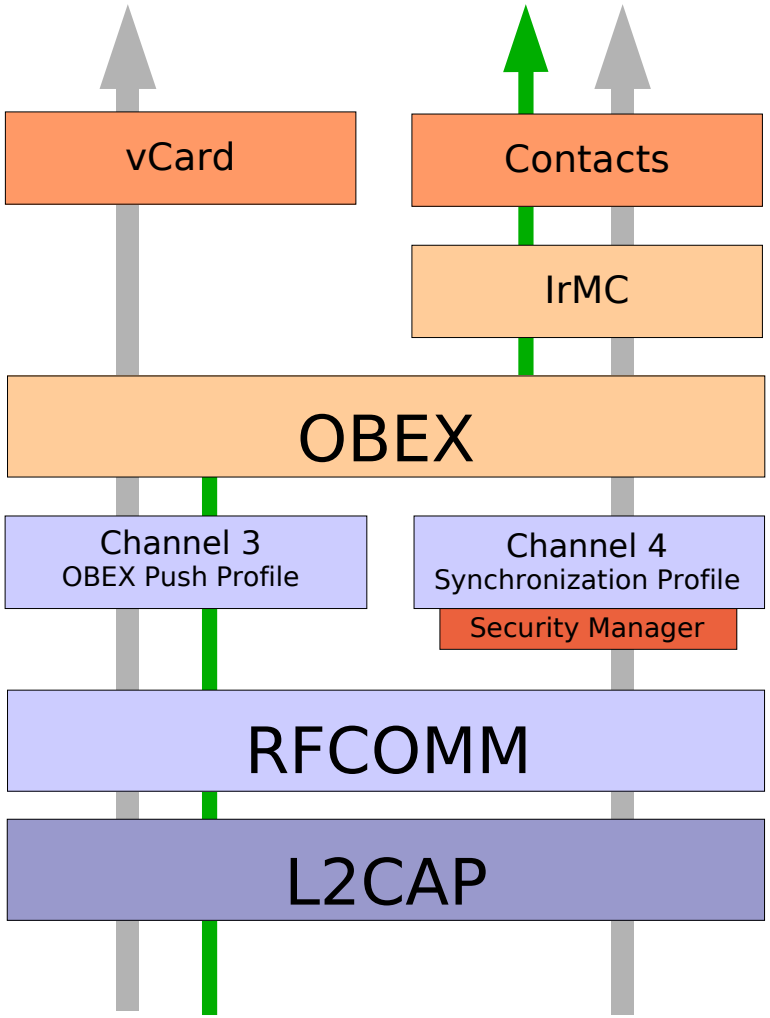

BlueBug

- Issuing AT Commands to covert service
  - BlueBug is based on AT Commands (ASCII Terminal)
    - Very common for the configuration and control of telecommunications devices
  - High level of control...
    - Call control (turning phone into a bug)
    - Sending/Reading/Deleting SMS
    - Reading/Writing Phonebook Entries
    - Setting Forwards
    - -> causing costs on the vulnerable phones!

HeloMoto

- Requires entry in 'My Devices'
- OBEX PUSH to create entry
- Connect RFCOMM to Handsfree or Headset
  - No Key required
  - Full AT command set access
- Motorola V80, V5xx, V6xx and E398

BlueSmack

- Using L2CAP echo feature
  - Signal channel request/response
  - L2CAP signal MTU is unknown
  - No open L2CAP channel needed
- Buffer overflow
- Denial of service attack

Mode3 Abuse

- Create Pairing
  - Authenticate for benign task (e.g. vCard exchange)
  - Force authentication if required (set Mode 3)
- Connect to unauthorised Channels
  - Serial Profile, OBEX FTP, etc.

BlueStab

- Denial of Service Attack
  - *Name*<tab><dot> in Bluetooth friendly name
  - Unicode conversion doesn't handle tab-character correctly
  - Crashes Symbian Series 60 upon name resolve
  - Causes incorrect behaviour on Symbian UIQ
- Hard to set name on some devices
- Credits to: Q-Nix (and Collin)

BlueBump

- Forced Re-keying
  - Authenticate for benign task (e.g. vCard exchange)
  - Force authentication if required (Mode 3)
  - Named after Barry's bump keying (see next talk)
- Partner deletes pairing
  - Hold connection open
  - Request Link Key Exchange
- Connect to unauthorised Channels
  - Serial Profile, OBEX FTP, etc.

BlueSpooof

- Clone a trusted device
  - Device address
  - Service records
  - Emulate protocols and profiles
- Disable encryption
- Force re-pairing
- Works for services that do not require link key . authentication

BlueDump

- Yanic Shaked and Avishai Wool
  - http://www.eng.tau.ac.il/~yash/Bluetooth/
  - Expands PIN attack from Ollie Whitehouse
  - Requires special hardware or firmware
- Destroy trust relationship
  - Use the BlueSpooof methods
- User interaction for pairing still needed

Bluetooone

- Enhancing the range of a Bluetooth dongle by connecting a directior antenna -> as done in th Long Distance Attack
- Original idea from Mike Outmesguine (Author of Book: “Wi-Fi Toys”)
- Step by Step instruction (trifinite.org

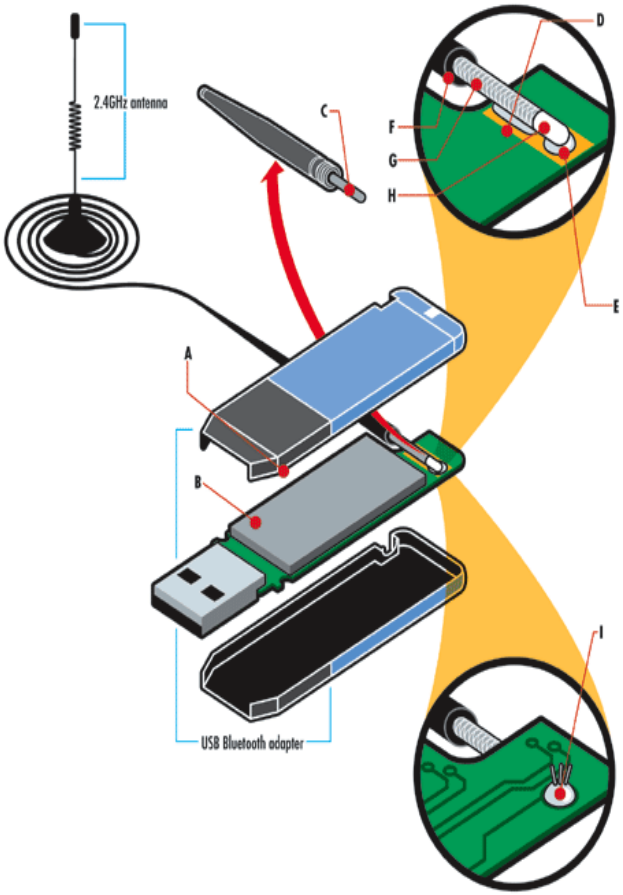

Long-Distance Attacking

- Beginning of August 2004 (right after DEFCON 12)
- Experiment in Santa Monica California with Flexilis
- Modified Class-1 Dongle Snarfing/Bugging Class-2 device (Nokia 6310i) from a distance of 1,62 km (1.01 miles)

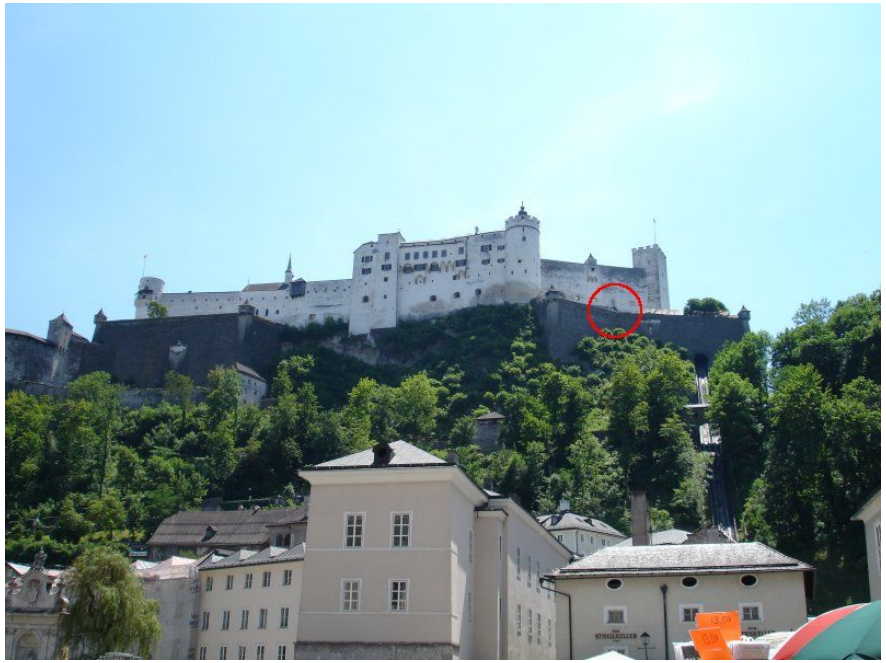

Blooover -What is it?

- Blooover - *Bluetooth* Wireless Technology Hoover
- Proof-of-Concept Application
- Educational Purposes only
- Phone Auditing Tool
- Running on Java
  - J2ME MIDP 2.0
  - Implemented JSR-82 (Bluetooth API)
  - Nokia 6600, Nokia 7610,
    Nokia 6670, ... Series 60
    Siemens S65
    SonyEricsson P900 ...

Blooover- What does it do?

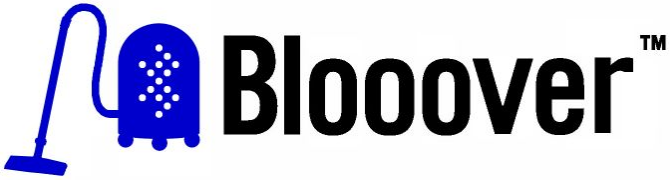

- Blooover performs the BlueBug attack
  - Reading phonebooks
  - Writing phonebook entries
  - Reading/decoding SMS stored on the device (buggy..)
  - Setting Call forward (predef. Number) +49 1337 7001
  - Initiating phone call (predef. Number) 0800 2848283
    - Not working well on Nokia phones :(but on some T610
- Please use this application responsibly!
  - Not with phones of strangers...

Blooover

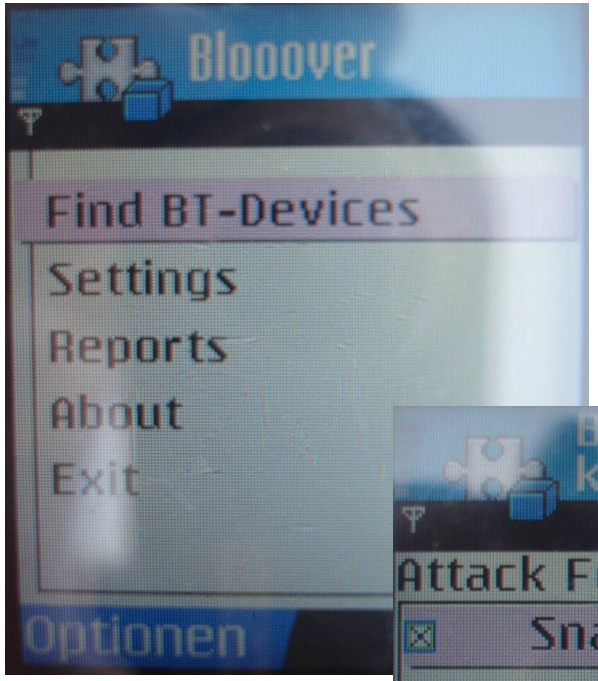
Blooover
Find BT-Devices
Settings
Reports
About
Exit
Optionen

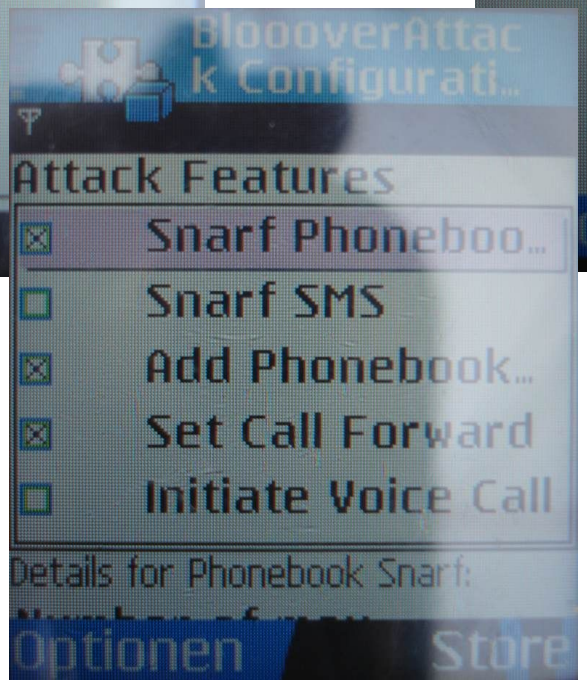
BloooverAttac
k Configurati...
Attack Features
Snarf Phoneboo...
Snarf SMS
Add Phonebook...
Set Call Forward
Initiate Voice Call
Details for Phonebook Snarf:
Optionen
Store

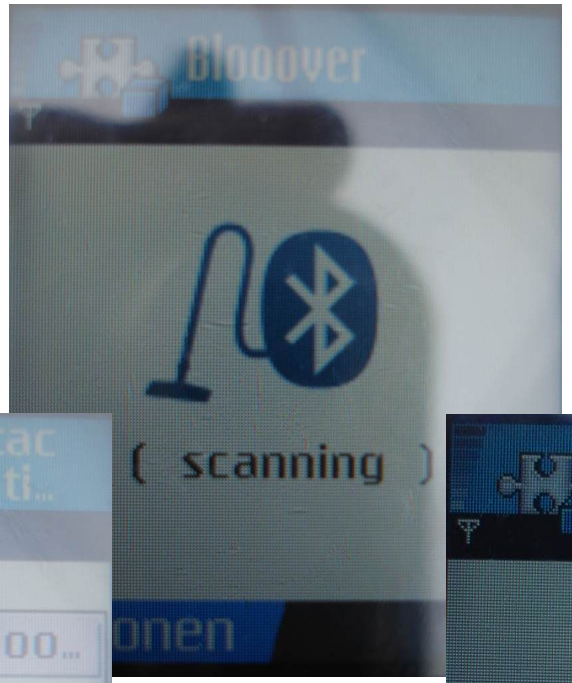
Blooover
(scanning)

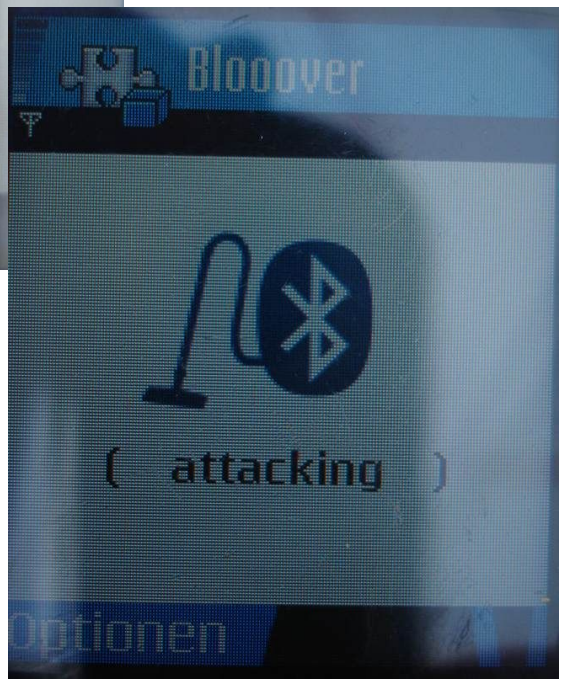
Blooover
(attacking)
Optionen

Blueprinting – What is it?

- Blueprinting is fingerprinting *Bluetooth* Wireless Technology interfaces of devices
- This work has been started by Collin R. Mulliner and Martin Herfurt
- Relevant to all kinds of applications
  - Security auditing
  - Device Statistics
  - Automated Application Distribution
- Released paper and tool at 21C3 in December 2004 in Berlin

BluePot

- Bluetooth HoneyPot
  - Runs on J2ME phones (with BT-API)
  - Imitates vulnerable phone
  - Logs incoming attacks & device info
  - Strikeback capable
- Authored by Martin Herfurt
- Not officially released

The Car Whisperer

- Uses standard passkey to connect to carkits
- Injects audio
- Records audio
- Use it
  - for talking to other drivers (be nice)
  - for eavesdropping to conversations in other cars
  - responsible!

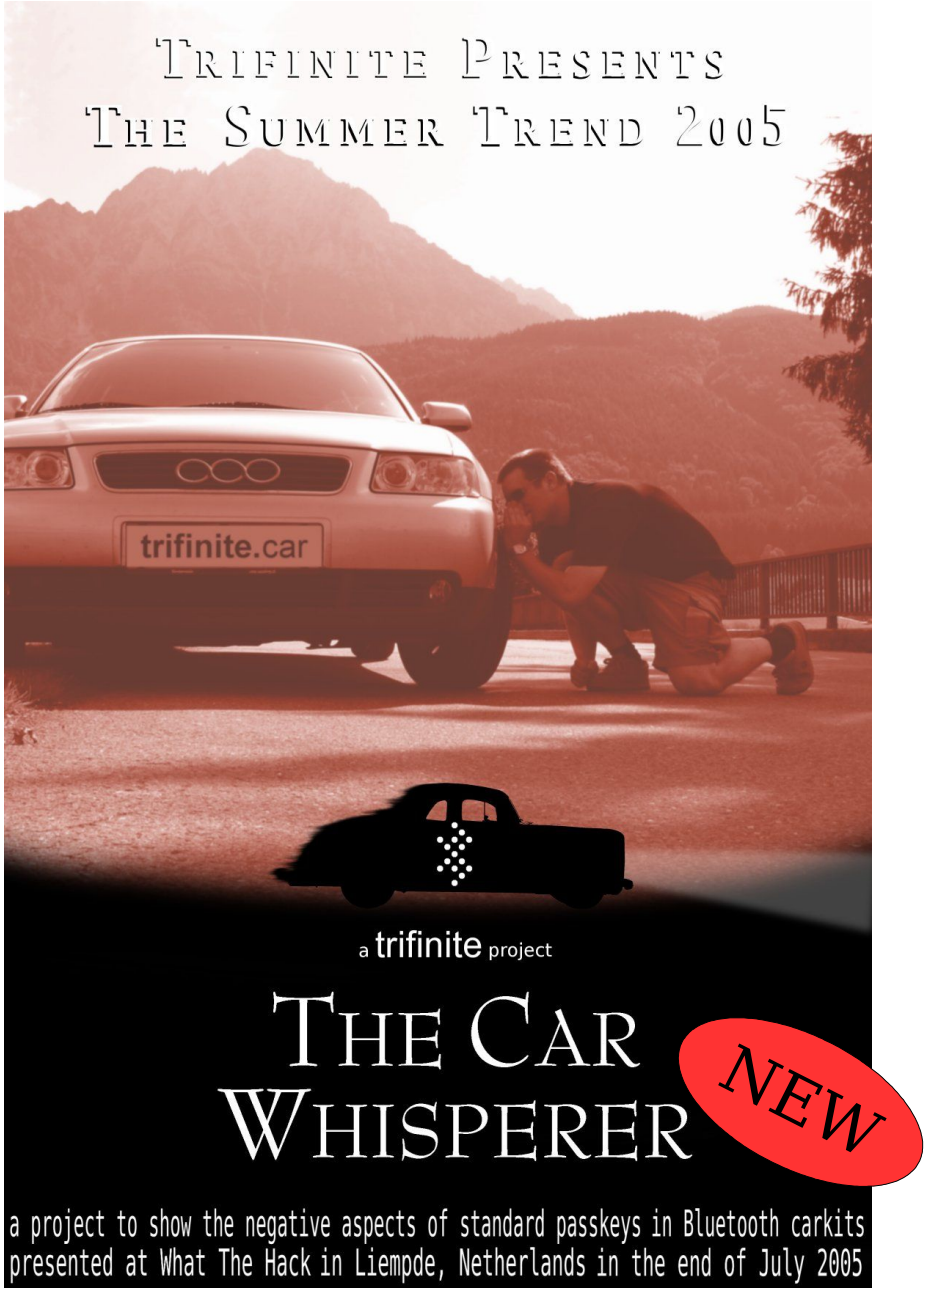

The Car Whisperer (General Information)

- Components
  - cw_pin.sh – Pin helper with standard passkeys (replaces bluepin.sh)
    - Uses defined standard passkey according to manufacturer-part of BDADDR
  - carwhisperer – connects rfcomm and SCO channels
  - cw_scanner – scans for devices with right class and calls carwhisperer

The Car Whisperer (Setup 1)

- Stationary directional antenna
  - 15s visibilty (avg. speed 120km/h; range 500m)

The Car Whisperer (Setup 2)

- Mobile approach (antenna optional)
  - Find car
  - Follow car
  - Don't whisper and drive ! ;)

Blooonix

- Linux distribution for Bluetooth audits
  - LiveCD based on Morphix
  - Latest official Linux 2.6 kernel
  - Contains all latest BlueZ utilities
  - Includes also special hacker scripts
  - Graphical interface
  - Report generation
- Not available at the moment

Blooover II

- Successor of the popular Blooover application
  - More like an auditing toool for professionals
  - More attacks than BlueBug
    - Every attack that can be done on a J2ME device
    - Not all attacks are feasible!
- To be developed later

Conclusions

- Bluetooth is a secure standard (per se)
  - Problems at application level
- Cooperation with Bluetooth SIG
  - Pre-release testing at UPF (UnplugFests)
  - Better communication channels for external testers
    - Security Expert Group mailing list
    - bluetooth.org more open areas
  - Mandatory security at application level
- We offer 'trust' to anyone!
  - Trust stands for: trifinite unified security testing

trifinite.org

- http://trifinite.org/
- Loose association of BT security experts
- Features
  - **trifinite.**blog
  - **trifinite.**stuff
  - **trifinite.**album
  - **trifinite.**group

trifinite.group

- Adam Laurie (the Bunker Secure Hosting)
- Marcel Holtmann (BlueZ)
- Collin Mulliner (mulliner.org)
- Tim Hurman (Pentest)
- Mark Rowe (Pentest)
- Martin Herfurt (trifinite.org)
- Spot (Sony)

Questions / Feedback / Answers

- Contact us via mailto:whatthehack@trifinite.org (group alias for Adam, Marcel and Martin)